


Warm, Cold Bulkheads & Bench

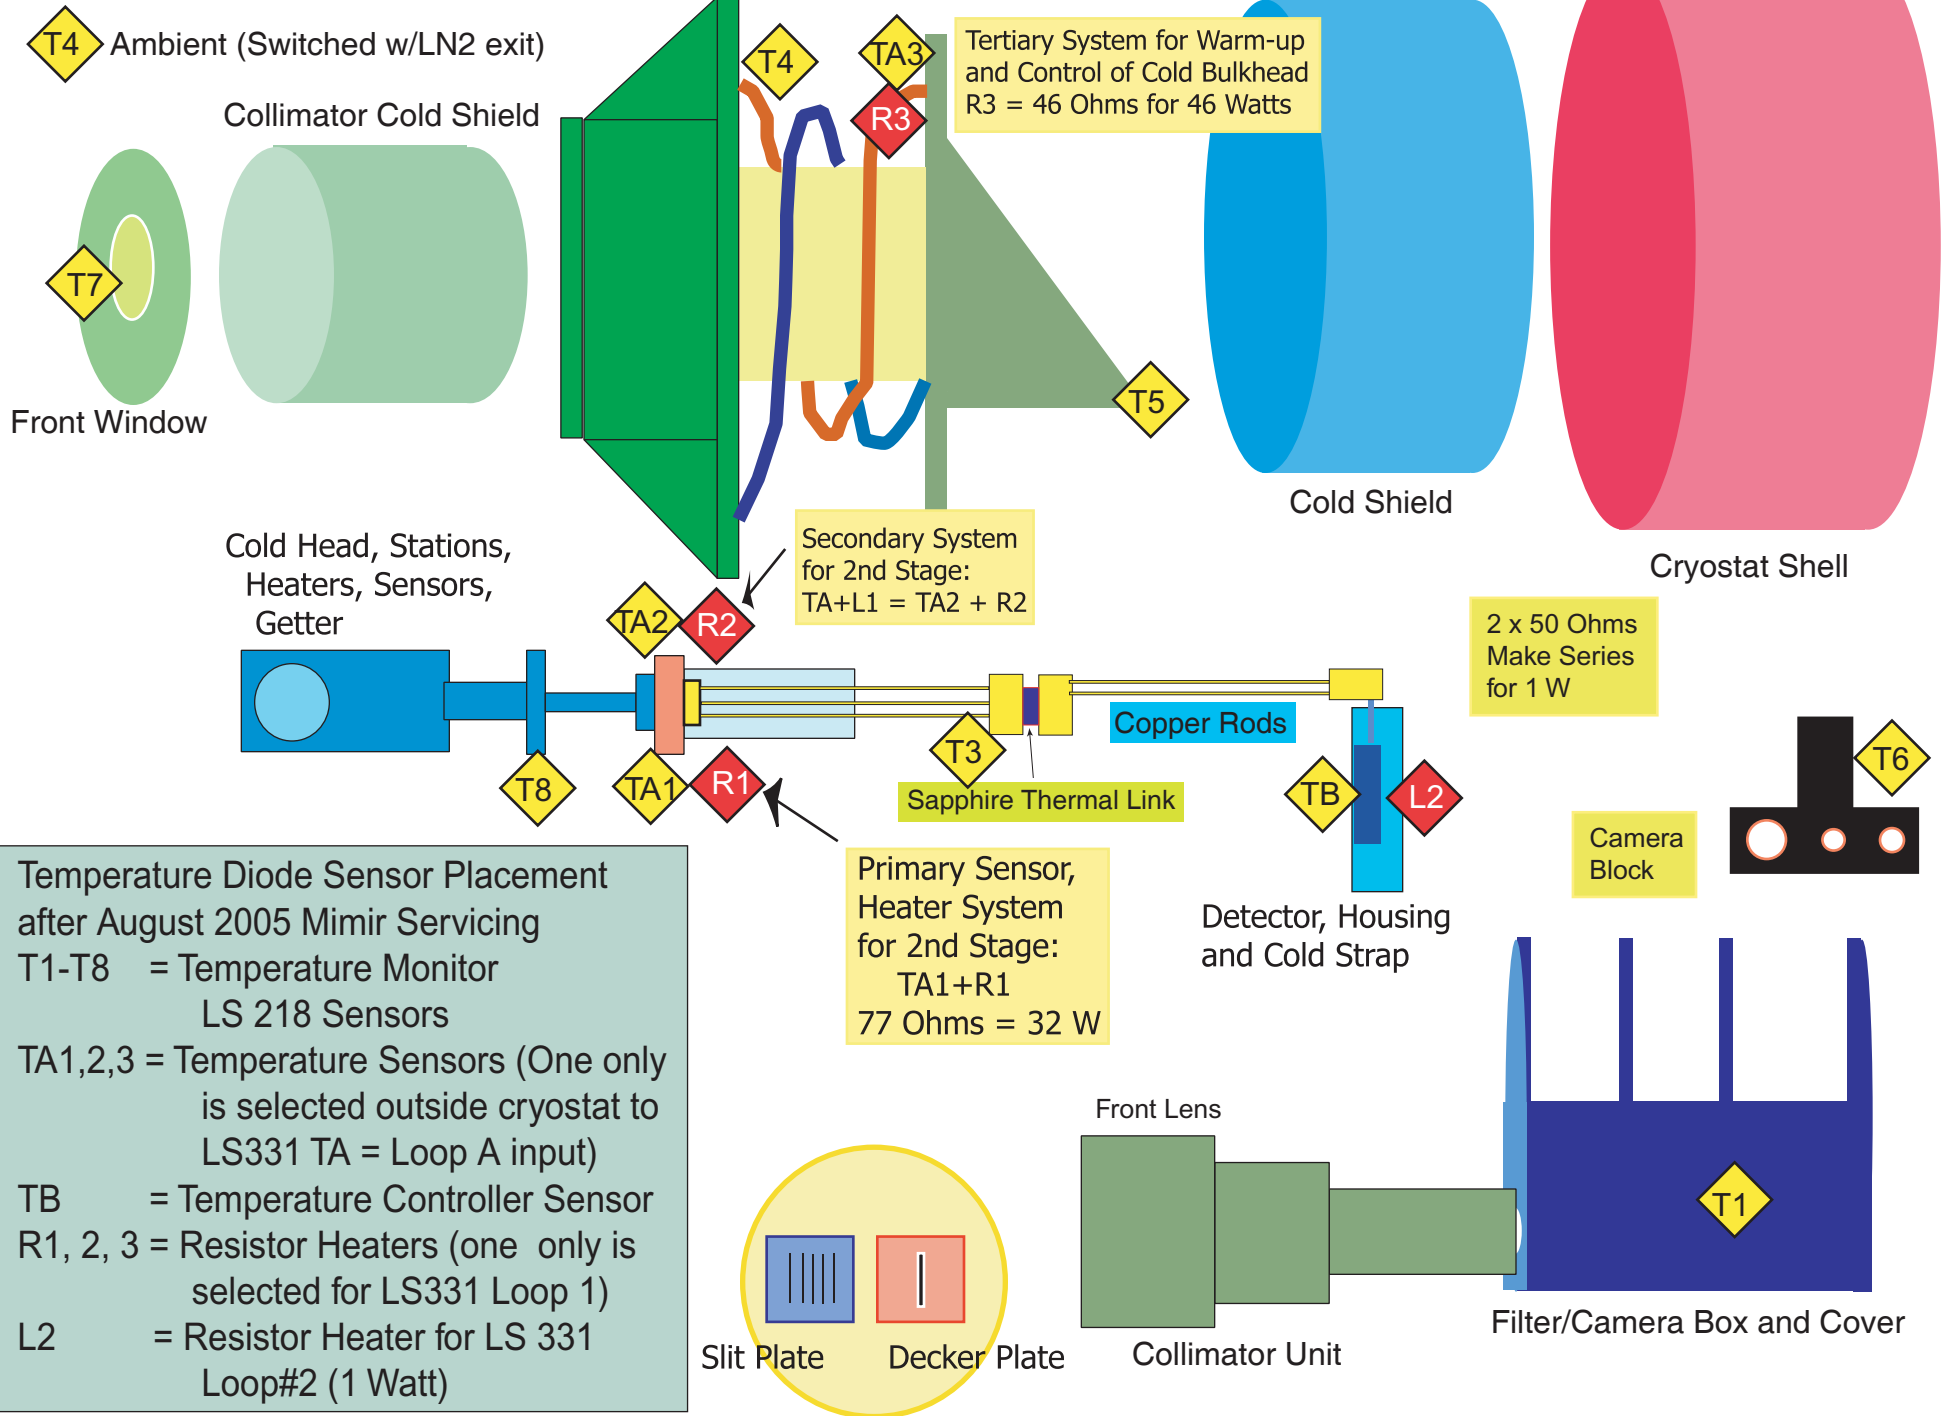

Temperature Diode Sensor Placement after August 2005 Mimir Servicing

T1-T8 = Temperature Monitor LS 218 Sensors

TA1,2,3 = Temperature Sensors (One only is selected outside cryostat to LS331 TA = Loop A input)

TB = Temperature Controller Sensor

R1, 2, 3 = Resistor Heaters (one only is selected for LS331 Loop 1)

L2 = Resistor Heater for LS 331 Loop#2 (1 Watt)